



# SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS REGULATORY, WARNING, AND GUIDE SIGNS

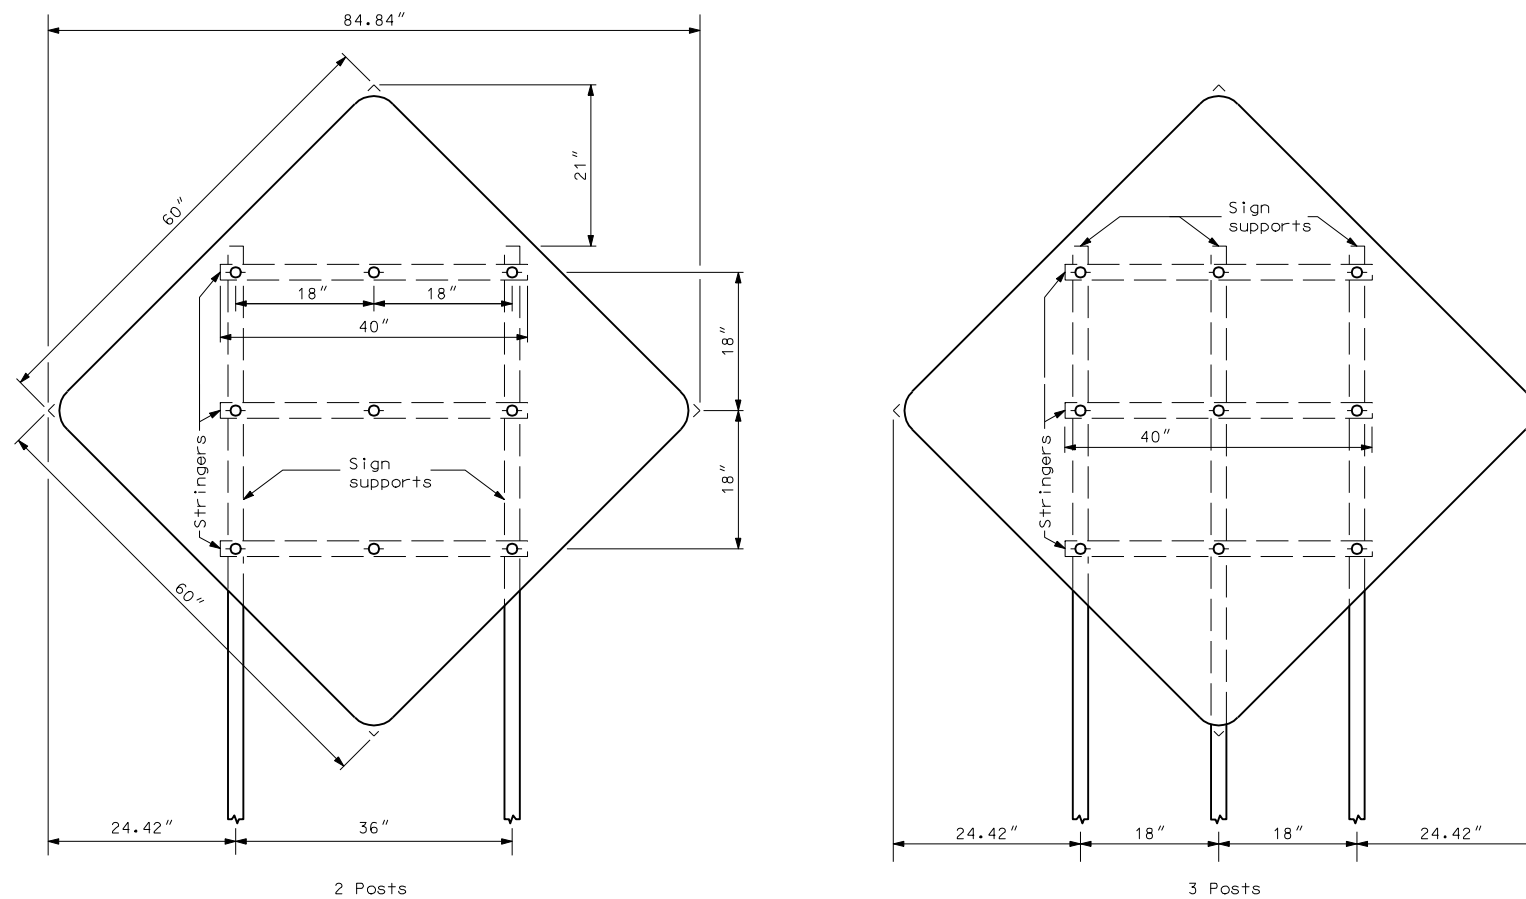

ASSEMBLY NO. 62

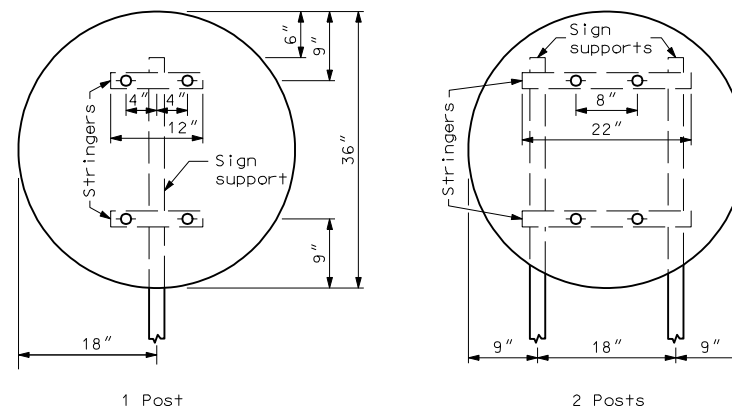

ASSEMBLY NO. 63

## NOTES:

1. See standard D-754-24 for mounting details.
2. The minimum sign backing material thickness shall be 0.100 inch.
3. Perforated square tube stringer shall be  $1\frac{1}{2}" \times 1\frac{1}{2}"$ .
4. All holes shall be punched round for  $\frac{3}{8}"$  bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-1-86	
REVISIONS	
DATE	CHANGE
05-01-92	General revisions
05-21-01	Layout revision
10-13-04	Note revisions
12-01-04	PE Stamp added

This document was originally issued and sealed by MARK S GAYDOS, Registration Number PE-4518, on 12/01/04 and the original document is stored at the North Dakota Department of Transportation